


TERMINAL BLOCK #	DISCONNECT WIRING BASE COLOR/TRACER
1	GREEN -
2	YELLOW (ORANGE) -
3	RED -
4	GREEN BLACK
5	YELLOW (ORANGE) BLACK
6	RED BLACK
7	BLUE -
8	WHITE BLACK
9	BLACK WHITE
10	BLUE BLACK
11	BLACK -
12	WHITE -

WIRE # 14 THHN, 19 STRAND COPPER, NYLON COATED PVC INSULATION, GAS & OIL RESISTANT.

NOTES:
 *1. USE BALANCE ARM ADJUSTER (CHTL 2357 TYPE) AS ALTERNATE.
 2. NO ANTI-SEIZE COMPOUND ON ANY NYLON MATERIALS.
 3. AFTER TERMINAL BLOCK IS WIRED THE SIGNAL CABLE IT TO BE SECURED TO BLOCK WITH TIE WRAPS (MIN. OF 2).

REVISIONS	
DATE	DESCRIPTION
01-05-2016	N/A

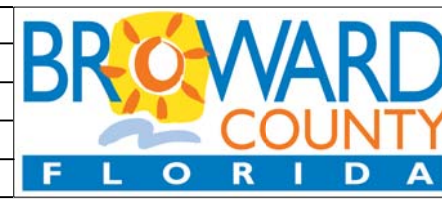

PUBLIC WORKS DEPARTMENT
 TRAFFIC ENGINEERING DIVISION

DESIGN BY: REBECCA MARTINEZ, P.E
 SCALE: NTS

DRAWN BY: STEPHON RAMOUTAR

CHECKED BY: YVES D'ANJOU, P.E

**SPAN WIRE INSTALLATION
 DETAILS**

SHEET NO.
 1 OF 1